

# ELECTRIC DRYERS

**NEW  
PRODUCTS  
2024**





INGA IN1B-L  
black  
859 x 91 mm

INGA IN1SS - L  
polished stainless steel  
859 x 91 mm



## TIMER function






2 h function - the dryer will heat for 2 hours, then it will turn off automatically.

4 h function - the dryer will heat for 4 hours, then it will turn off automatically.

ON/OFF

The green LED indicates that the dryer is on.

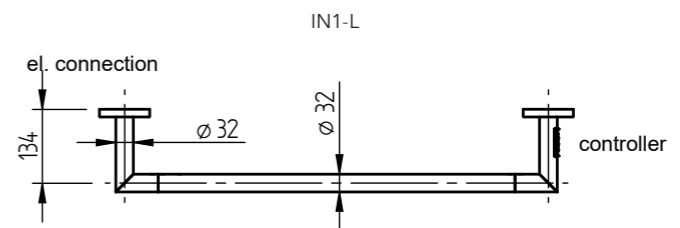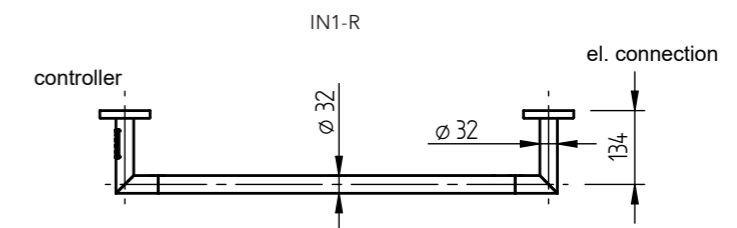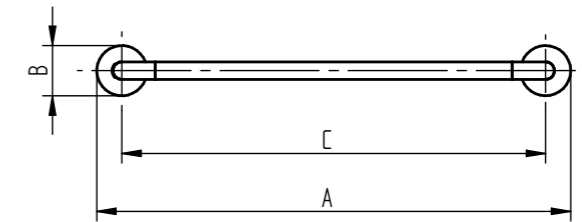

INGA	black	polished stainless steel	Width (A) x Height (B) [mm]	C	hidden connection	Weight [kg]	HO [W]	Degree of protection
right	IN1B-R	IN1SS-R	859 x 91	768	✓	1,2	17	IP44
left	IN1B-L	IN1SS-L	859 x 91	768	✓	1,2	17	IP44

The right/left variant differs according to the location of the electric connection. If the electric connection is on the right IN1-R, the controller is on the opposite side on the left.

# MAIA



MAIA MA1B - LK  
black  
600 x 1700 - 1770 mm



# MAIA

## TIMER function




2 h function - the dryer will heat for 2 hours, then it will turn off automatically.

4 h function - the dryer will heat for 4 hours, then it will turn off automatically.

### ON/OFF

The green LED indicates that the dryer is on.

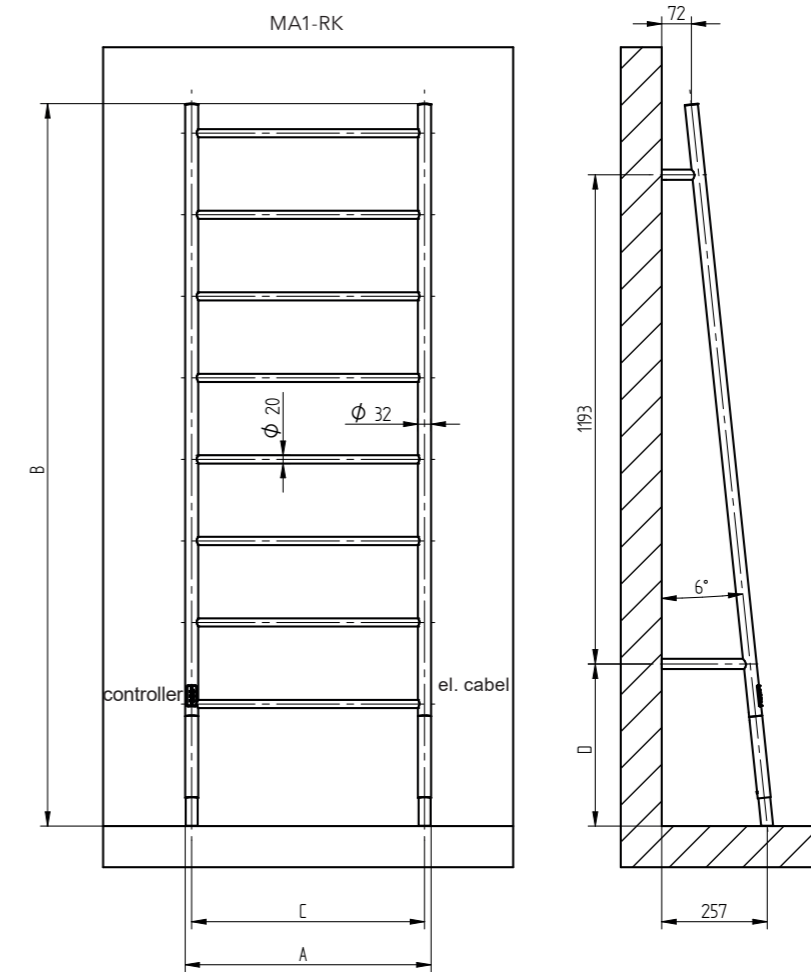

MAIA	black	polished stainless steel	Width (A) x Height (B) [mm]	C	With cabel	Weight [kg]	HO [W]	Degree of protection
right	MA1B-RK	MA1SS-RK	600 x 1700 - 1770	562	✓	6	93	IP44
left	MA1B-LK	MA1SS-LK	600 x 1700 - 1770	562	✓	6	93	IP44

The right/left variant differs according to the location of the electric cable. If the electric cable is on the right MA1-RK, controller is on the opposite side on the left.

ELECTRIC DRYER



BRITTA BR1B-L  
black  
859 x 712 mm



BRITTA BR1SS-RK  
polished stainless steel  
859 x 712 mm

### TIMER function




2 h function - the dryer will heat for 2 hours, then it will turn off automatically.

4 h function - the dryer will heat for 4 hours, then it will turn off automatically.

ON/OFF

The green LED indicates that the dryer is on.

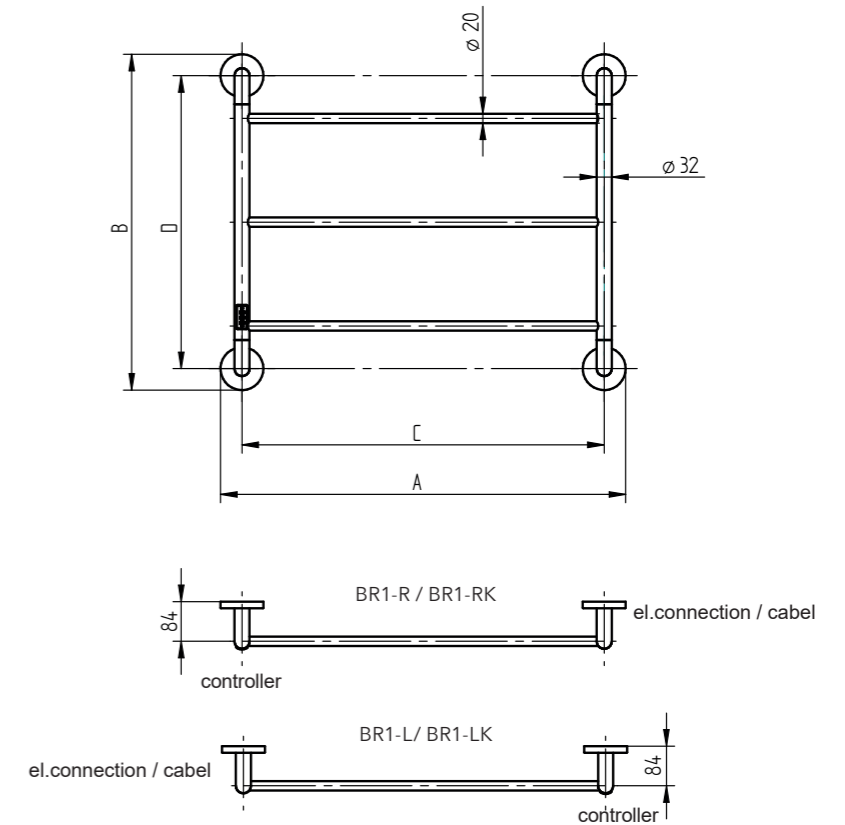

ELECTRIC DRYER

BRITTA	black	polished stainless steel	Width (A) x Height(B) [mm]	C	hidden connection	with cabel	Weight [kg]	HO [W]	Degree of protection
right	BR1B-R	BR1SS-R	859 x 712	768	✓		2,9	42	IP44
left	BR1B-L	BR1SS-L	859 x 712	768	✓		2,9	42	IP44
right	BR1B-RK	BR1SS-RK	859 x 712	768		✓	2,9	42	IP44
left	BR1B-LK	BR1SS-LK	859 x 712	768		✓	2,9	42	IP44

The right/left variant differs according to the location of the electric connection/cable. If the electric connection/cable is on the right BR1-R/BR1-RK, controller is on the opposite side on the left.



### TIMER function



2 h function - the dryer will heat for 2 hours, then it will turn off automatically.


4 h function - the dryer will heat for 4 hours, then it will turn off automatically.

### ON/OFF

The green LED indicates that the dryer is on.



OL1

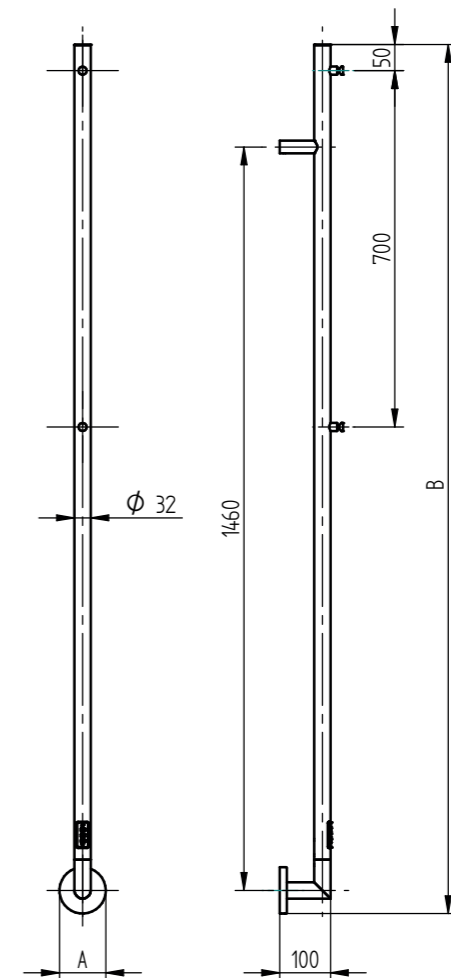

ELECTRIC DRYER



OLE OL1B  
black  
91 x 1708 mm



OLE OL1SS  
polished stainless steel  
91 x 1708 mm



OLE	black	polished stainless steel	Width(A) x Height (B) [mm]	hidden connection	Weight [kg]	HO [W]	Degree of protection
	OL1B	OL1SS	91 x 1708	✓	1,5	24	IP44

# LISA

LISA LS1SS  
polished stainless steel  
91 x 1708 mm



LISA LS1SS  
polished stainless steel  
91 x 1708 mm



LISA LS1B  
black  
91 x 1708 mm

# LISA

## TIMER function




2 h function - the dryer will heat for 2 hours, then it will turn off automatically.

4 h function - the dryer will heat for 4 hours, then it will turn off automatically.

ON/OFF

The green LED indicates that the dryer is on.

detail LISA black

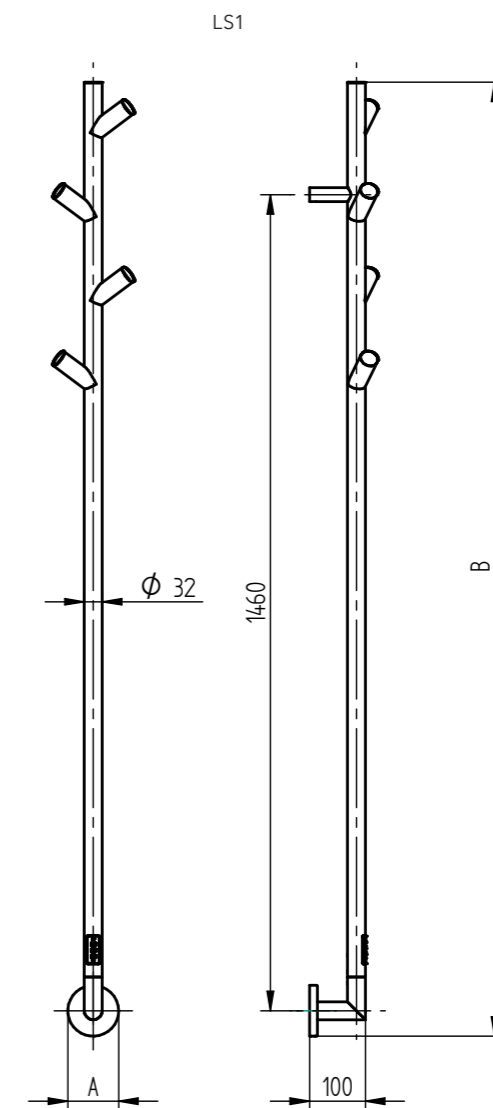

ELECTRIC DRYER

LISA	black	polished stainless steel	Width(A) x Height (B) [mm]	hidden connection	Weight [kg]	HO [W]	Degree of protection
	LS1B	LS1SS	91 x 1708	✓	1,8	24	IP44



NIKLAS NI1SS-L  
polished stainless steel  
657 x 952 mm



detail el.cabel



### TIMER function




2 h function - the dryer will heat for 2 hours, then it will turn off automatically.

4 h function - the dryer will heat for 4 hours, then it will turn off automatically.

ON/OFF


The green LED indicates that the dryer is on.

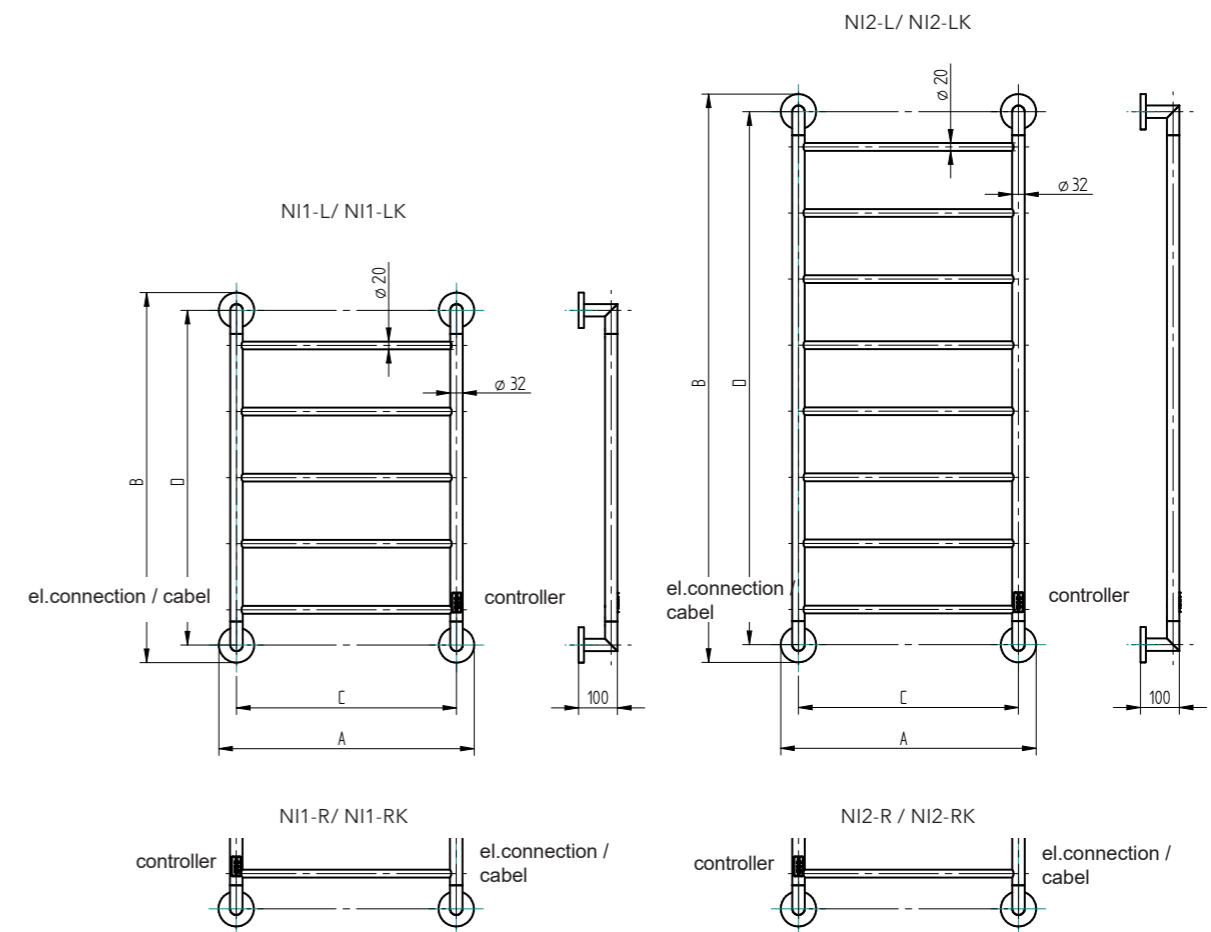

ELECTRIC DRYER

NIKLAS	black	polished stainless steel	Width (A) x Height (B) [mm]	C	hidden connection	with cabel	Weight [kg]	Weight [W]	Degree of protection
right	NI1B-R	NI1SS-R	657 x 952	566	✓		3,7	54	IP44
left	NI1B-L	NI1SS-L	657 x 952	566	✓		3,7	54	IP44
right	NI1B-RK	NI1SS-RK	657 x 952	566		✓	3,7	54	IP44
left	NI1B-LK	NI1SS-LK	657 x 952	566		✓	3,7	54	IP44
right	NI2B-R	NI2SS-R	657 x 1462	566	✓		5,3	93	IP44
left	NI2B-L	NI2SS-L	657 x 1462	566	✓		5,3	93	IP44
right	NI2B-RK	NI2SS-RK	657 x 1462	566		✓	5,3	93	IP44
left	NI2B-LK	NI2SS-LK	657 x 1462	566		✓	5,3	93	IP44

The right/left variant differs according to the location of the electric connection/cable. If the electric connection/cable is on the right NI1B-R/NI1B-RK, controller is on the opposite side on the left.

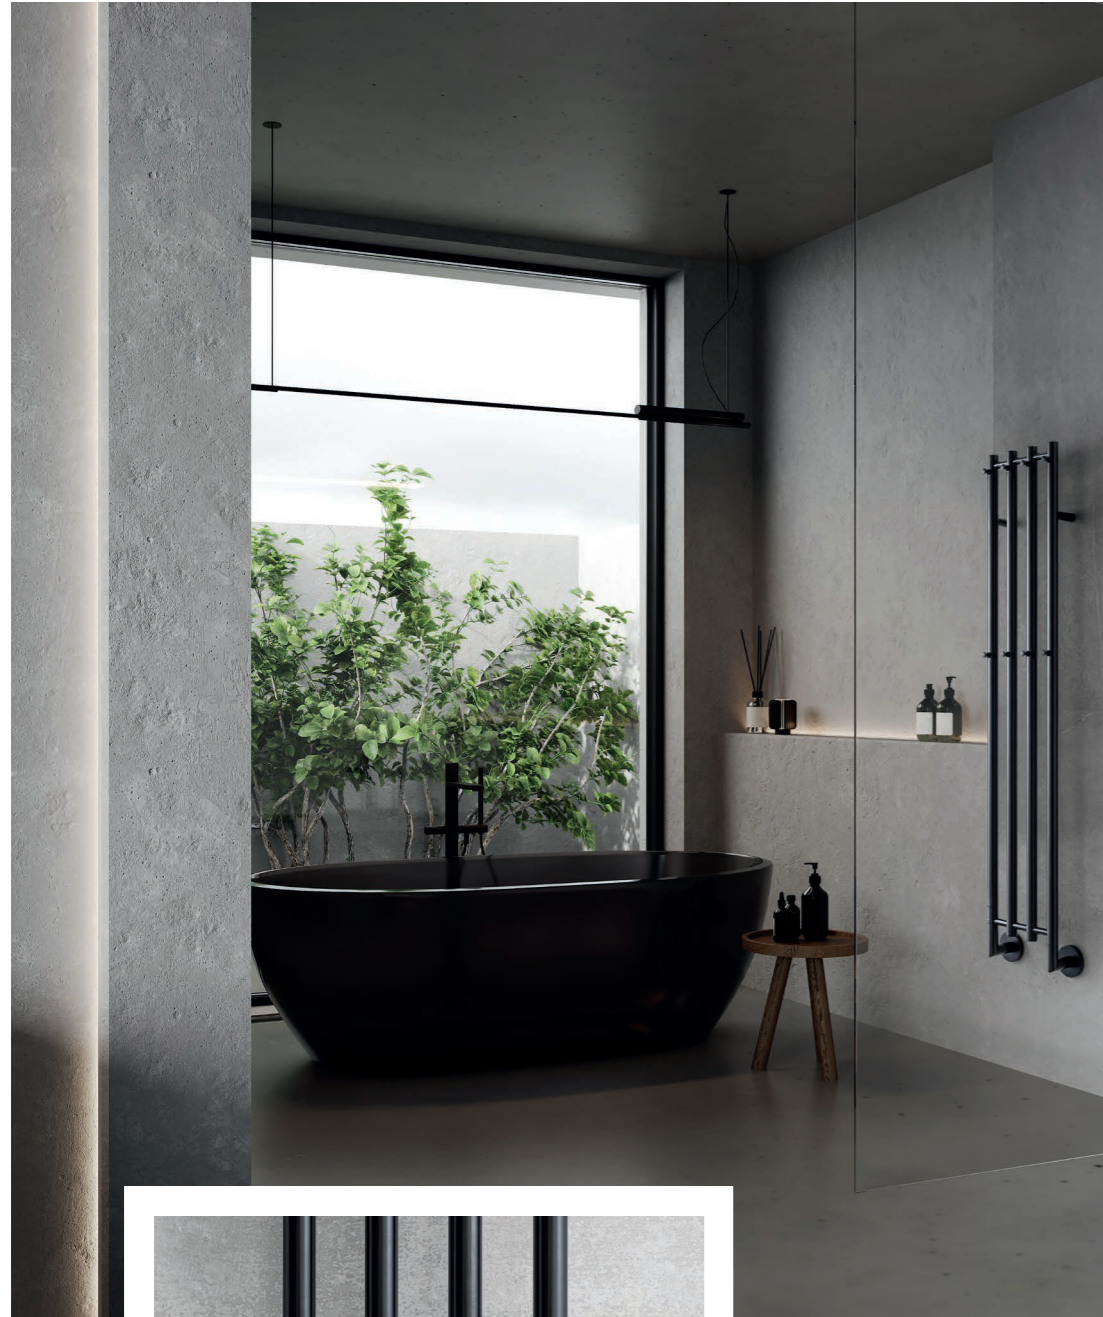

MONA MO1B-L  
black  
331 x 1533 mm



MONA MO1SS-LK  
polished stainless steel  
331 x 1533 mm

### TIMER function




2 h function - the dryer will heat for 2 hours, then it will turn off automatically.

4 h function - the dryer will heat for 4 hours, then it will turn off automatically.

### ON/OFF

The green LED indicates that the dryer is on.

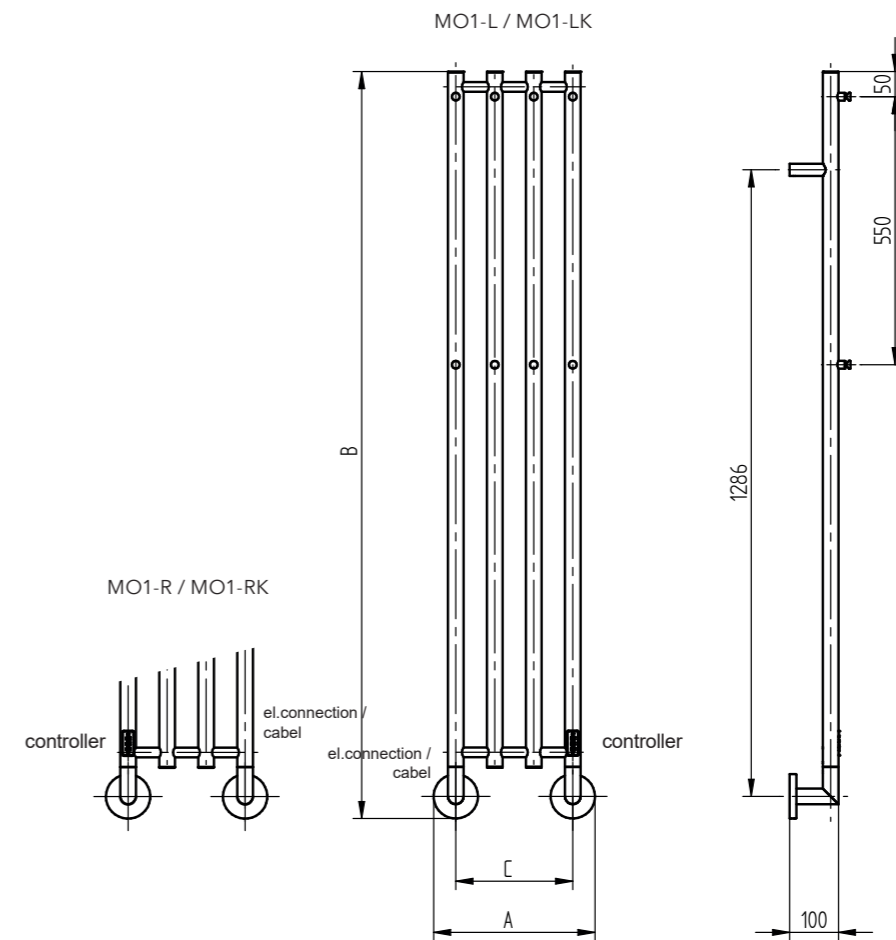

MONA	black	polished stainless steel	Width (A) x Height (B) [mm]	C	hidden connection	with cabel	Weight [kg]	HO [W]	Degree of protection
pravá	MO1B-R	MO1SS-R	331 x 1533	240	✓		5,6	93	IP44
levá	MO1B-L	MO1SS-L	331 x 1533	240	✓		5,6	93	IP44
pravá	MO1B-RK	MO1SS-RK	331 x 1533	240		✓	5,6	93	IP44
levá	MO1B-LK	MO1SS-LK	331 x 1533	240		✓	5,6	93	IP44

The right/left variant differs according to the location of the electric connection/cable. If the electric connection/cable is on the right MO1-R/MO1-RK, controller is on the opposite side on the left.



P.M.H. Design s.r.o.  
Přísečná 556  
CZ 381 01 Český Krumlov

T: 00420 380 711 237  
E: info@pmh-co.cz

[www.pmh-co.cz](http://www.pmh-co.cz)

