

TAIFUN





TAIFUN - chrome
500 × 790 mm



TAIFUN - white coated
600 × 1210 mm

Location of "attachment" to the wall: ↓ 50 mm ↑ 50 mm
 Central heating: YES
 Combination heating: YES
 Electric heating: YES
 Horizontal tubes: Ø 14 mm
 Vertical tubes: Ø 32 mm

Connection options:

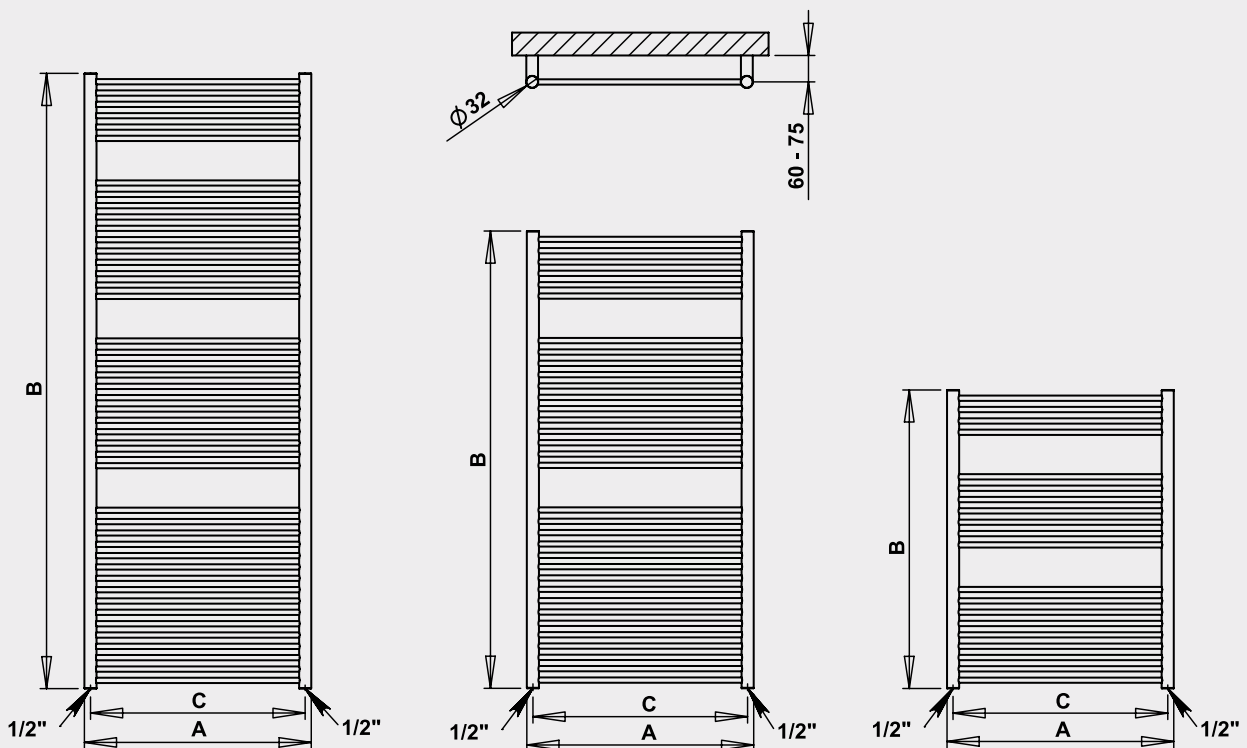

Chrome**	Brushed stainless	White coated	Other surface finish (coated)*	Width (A) x Height (B) [mm]	HO [W] Δt 20°C***		Weight [kg]	Content [l]	Connection span (C) [mm]	Max. recommended electric heating element [W]
					75/65°C	55/45°C				
TS1C	TS1SS	TS1W	TS1	500 × 790	382	199	5,9	3,9	468	300
TS2C	TS2SS	TS2W	TS2	600 × 790	463	241	7,2	4,5	568	300
TS3C	TS3SS	TS3W	TS3	500 × 1210	585	304	9,2	6,2	468	400
TS4C	TS4SS	TS4W	TS4	600 × 1210	717	373	11,0	7,3	568	400
TS5C	TS5SS	TS5W	TS5	500 × 1630	795	413	12,6	8,4	468	500
TS6C	TS6SS	TS6W	TS6	600 × 1630	974	506	14,6	9,9	568	500

*Other surface finishes see page 78. **Heat output of chrome versions can be 20% lower.

***Calculation of temperature gradients can be viewed on www.pmh-co.cz.