



# PLUTO

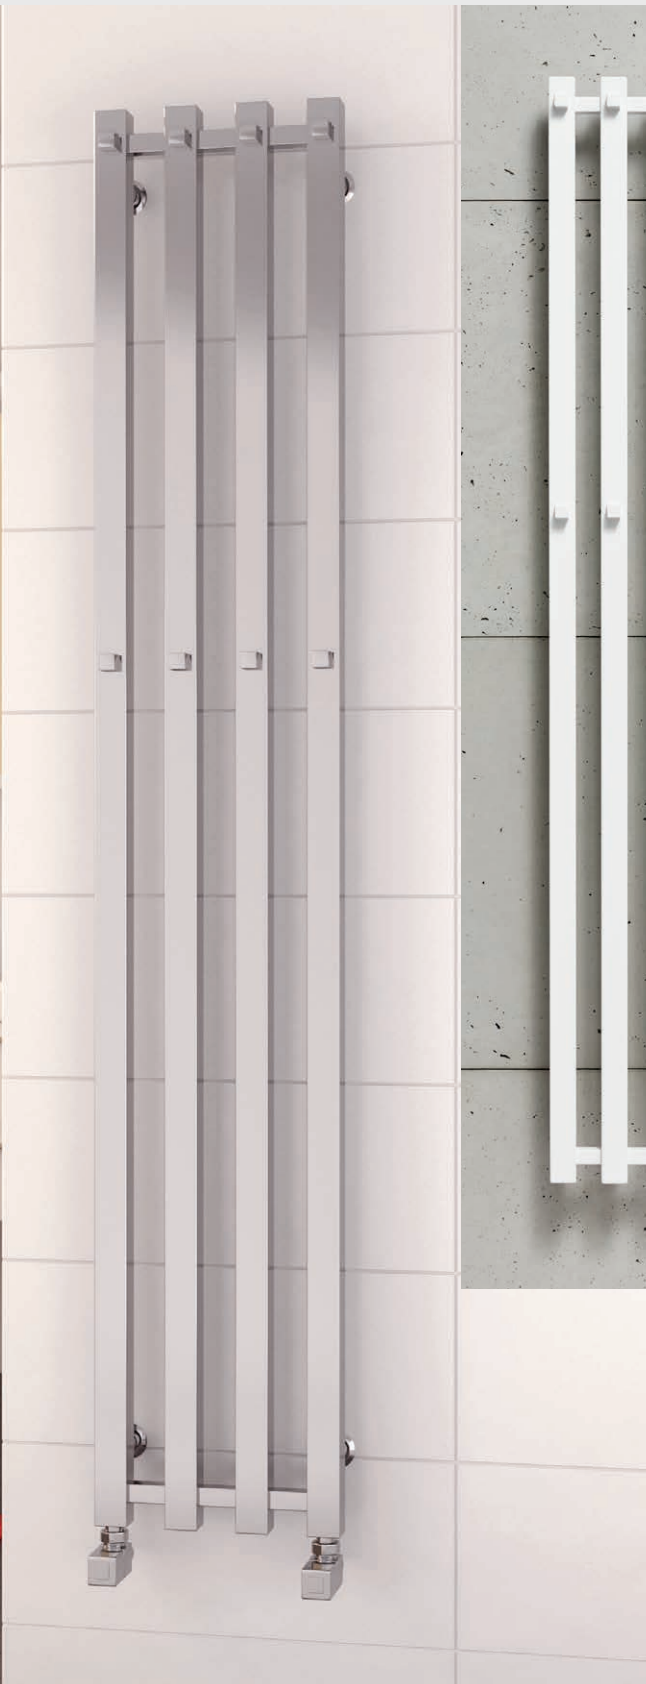

PLUTO P2W/4  
white coated  
245 × 1500 mm



PLUTO  
245 × 1500 mm

Location of "attachment" to the wall: ↓ 75 mm ↑ 75 mm


Central heating: YES

Combination heating: YES

Electric heating: YES





Vertical profile: 35 x 35 mm

Connection options:



C/C

one side

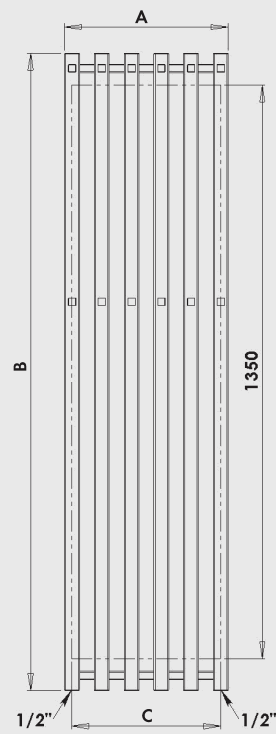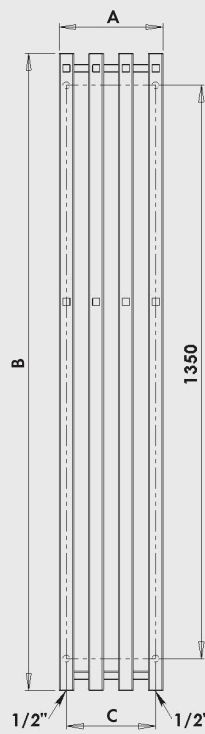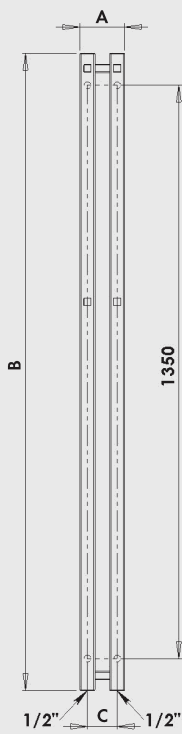

White coated	Other surface finish (coated)*	Width (A) x Height (B) [mm]	HO [W] Δt 20°C**		Weight [kg]	Content [l]	Connection span (C) [mm]	Max. recommended electric heating element [W]
			75/65°C	55/45°C				
P2W/2	P2/2	105 x 1500	203	106	4,74	3	70	200
P2W/4	P2/4	245 x 1500	406	211	9,46	6	210	300
P2W/6	P2/6	385 x 1500	609	317	14,19	9	350	500

\*Other surface finishes see page 78. \*\*Calculation of temperature gradients can be viewed on [www.pmh-co.cz](http://www.pmh-co.cz).