



Practical hooks for hanging towels and bathrobes



ROSENDAL R2B
black coated finish
266 × 1500 mm

ROSENDAL R2W
white coated finish
266 × 1500 mm

ROSENDAL R2C/6
chrome
420 × 1500 mm

Location of “attachment” to the wall: ↓ 75 mm ↑ 75 mm
Central heating: YES
Combination heating: YES
Electric heating: YES

Connection options:

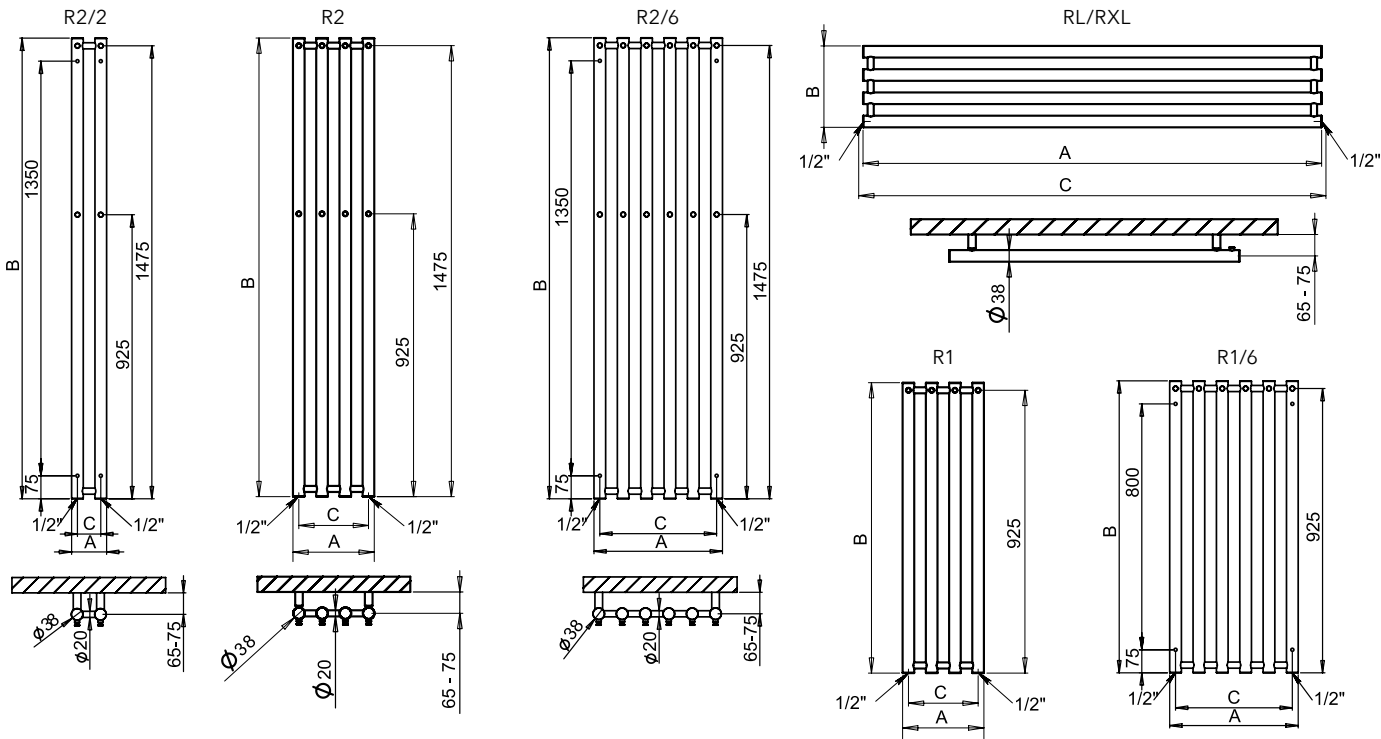

Chrome	Brushed stainless steel	Other surface finish (coated)*	Width (A) x Height (B) [mm]	Connection span (C) [mm]	HO [W] Δt 20°C 75/65°C			Max. recommended electric heating element [W]		
					Chrome	Stainless steel	Coated	Chrome	Stainless steel	Coated
R2C/2	R2SS/2	R2/2	115 x 1500	76	124	131	195	120	120	200
R1C	R1SS	R1	266 x 950	228	161	170	253	150	150	200
R2C	R2SS	R2	266 x 1500	228	250	265	393	200	200	300
R1C/6	R1SS/6	R1/6	420 x 950	380	242	257	381	200	200	300
R2C/6	R2SS/6	R2/6	420 x 1500	380	376	399	591	300	300	500

Horizontal version										
RLC	RLSS	RL	950 x 266	na dotaz •	161	170	253	-	-	-
RXLC	RXLSS	RXL	1500 x 266	na dotaz •	250	265	393	-	-	-

*Other surface finishes see page 79.
• Pitch according to the technical parameters of the selected valve. L and XL is not recommended for heating only with el. heating rod.
R2/2 -115 x 1500 - one-point valve cannot be used in combination with a heating rod.