






SORANO SNXLC - chrome
1210 × 480 mm

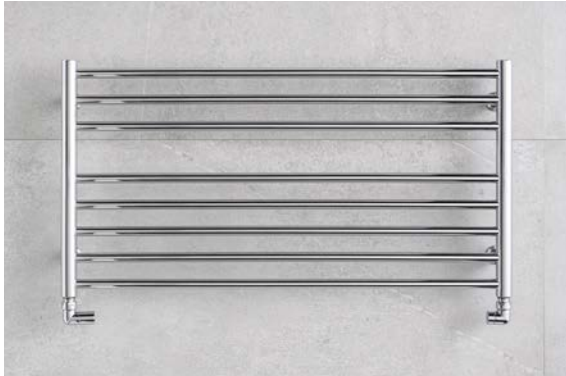

SORANO SN6C - chrome
600 × 1630 mm

Location of “attachment” to the wall: ↓ 80 mm ↑ 80 mm
Central heating: YES
Combination heating: YES
Electric heating: YES
Horizontal pipes: Ø 20 mm
Vertical pipes: Ø 32 mm

Connection options:

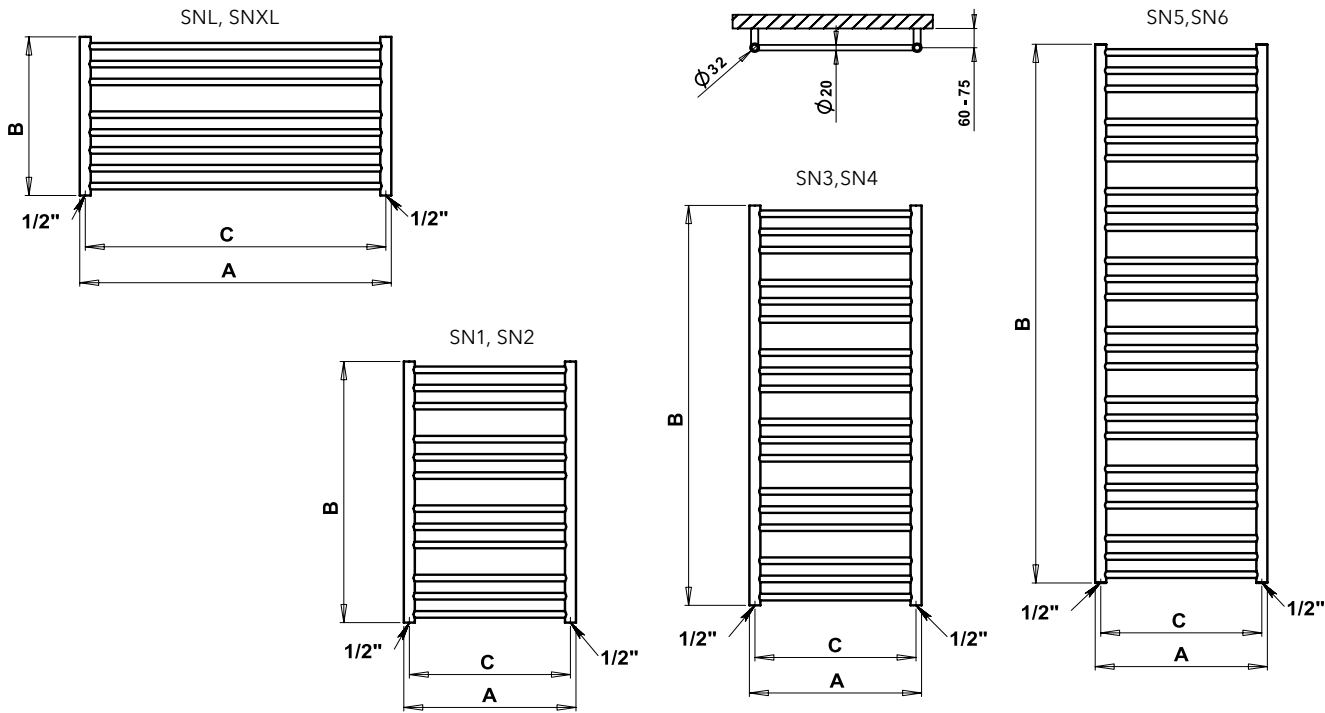

Chrome	Brushed stainless steel	Other surface finish (coated)*	Width (A) x Height (B) [mm]	Connection span (C) [mm]	HO [W] Δt 20°C 75/65°C			Max. recommended electric heating element [W]		
					Chrome	Stainless steel	Coated	Chrome	Stainless steel	Coated
SN1C	SN1SS	SN1	500 x 790	468	199	221	314	150	200	300
SN2C	SN2SS	SN2	600 x 790	568	229	255	361	200	200	300
SN3C	SN3SS	SN3	500 x 1210	468	301	334	474	300	300	400
SN4C	SN4SS	SN4	600 x 1210	568	346	385	545	300	300	500
SN5C	SN5SS	SN5	500 x 1630	468	402	447	634	400	400	600
SN6C	SN6SS	SN6	600 x 1630	568	463	514	729	400	500	600
Horizontal version										
SNLC	SNLSS	SNL	905 x 480	873	211	234	332	-	-	-
SNXLC	SNXLSS	SNXL	1210 x 480	1175	272	302	429	-	-	-

*Other surface finishes see page 79.
L and XL versions are not recommended for heating only with electric heating element.