


AVENTO FRAME

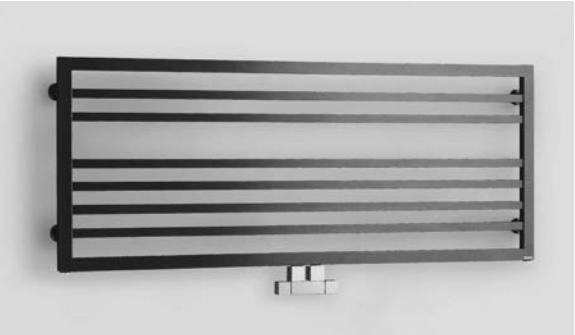

AVENTO AVFLA
anthracite coated, horizontal design
905 × 480 mm




AVENTO AVF4BE
beige (structural colour)
600 × 1210 mm

AVENTO AVF4C
chrome
600 × 1210 mm

AVENTO FRAME

Location of "attachment" to the wall: ↓ 80 mm ↑ 80 mm
Central heating: YES
Combination heating: YES
Electric heating: YES
Horizontal profile: 20 × 20 mm
Vertical profile: 30 × 30 mm

Connection options:

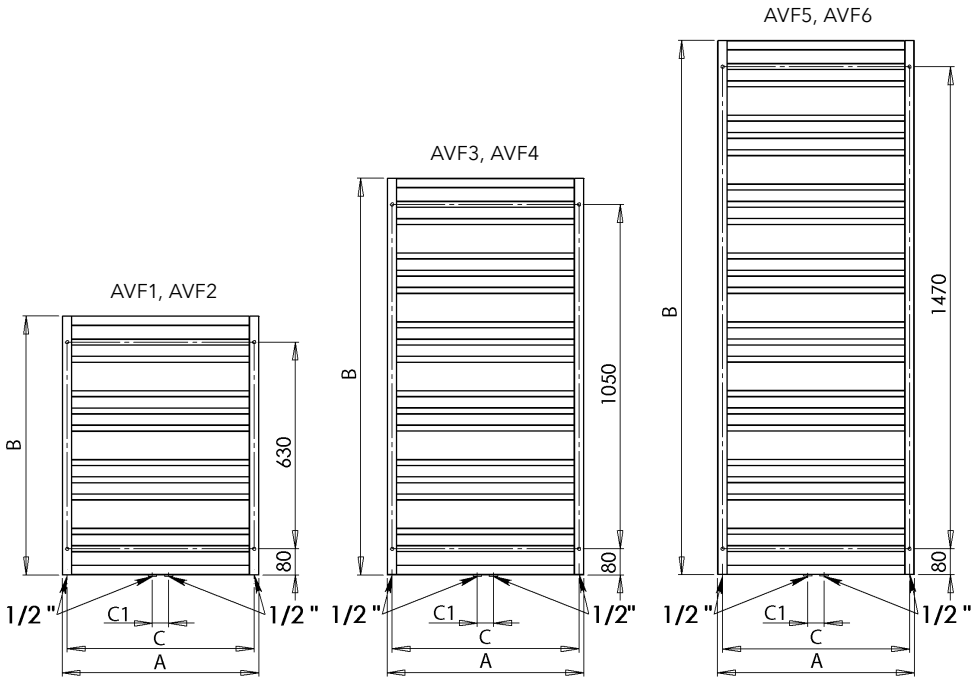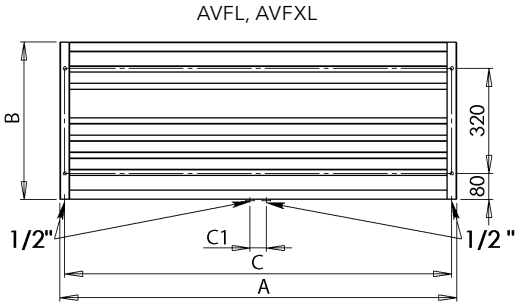

Chrome	Other surface finish (coated)*	Width (A) x Height (B) [mm]	Connection span (C, C1) [mm]	HO [W] At 20°C 75/65°C		Max. recommended electric heating element [W]	
				Chrome	Coated	Chrome	Coated
AVF1C	AVF1	500 x 790	470/50	218	344	200	300
AVF2C	AVF2	600 x 790	570/50	253	399	200	300
AVF3C	AVF3	500 x 1210	470/50	323	509	300	500
AVF4C	AVF4	600 x 1210	570/50	375	590	300	500
AVF5C	AVF5	500 x 1630	470/50	429	675	400	600
AVF6C	AVF6	600 x 1630	570/50	496	781	400	600
Horizontal version							
AVFLC	AVFL	905 x 480	875/50	244	384	-	-
AVFXLC	AVFXL	1210 x 480	1180/50	318	501	-	-

*Other surface finishes see page 79.
L and XL versions are not recommended for use with electric heating element.